


## How to Install your NEW S.R.Smith Handrail or Ladder

### Retrofitting onto Existing Deck

- Core drill a minimum 4" diameter hole for a standard bronze or 5" diameter hole for a universal anchor at least ½" deeper than the anchor depth.
- Clean and completely dry the hole with a pipe cleaner and shop vacuum.
- Ensure that the drain hole at the bottom of the anchor is not plugged to prevent corrosion. **Refer to Figure below.**
- Set anchor flush with deck, with wedge oriented away from pool. **Refer to Figure below.**
- Bond anchor to existing rebar in deck. **Make sure to follow NEC or local building codes.**
- Use either epoxy or compression cement with a minimum of 3,000 PSI. Epoxy or cement not included.
- Allow epoxy or cement to cure per manufacturer's instructions.

### New Construction

- Set anchor flush with the deck, with wedge oriented away from pool. **Refer to Figure below.**
- Bond anchor to rebar in deck. **Make sure to follow NEC or local building codes.**
- Pour concrete with minimum compression strength of 3,000 PSI. Concrete not included.
- Allow cement to cure per manufacturer's instructions.
- Install the ladder or rail into the anchor.

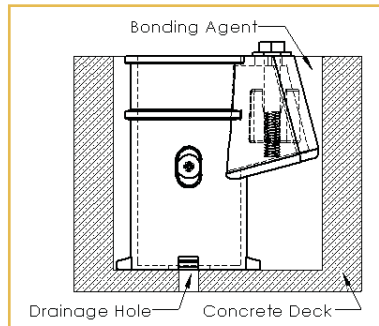

### Rainbow Pool Products

PO Box 2388, Mansfield Qld 4122

Telephone STD 61-7-3849 5385

Facsimile STD 61-7-3849 5384

Email: [info@rainbowpoolproducts.com.au](mailto:info@rainbowpoolproducts.com.au)


Web: [www.rainbowpoolproducts.com.au](http://www.rainbowpoolproducts.com.au)

### Replacing an Existing Rail

- Measure existing rail dimensions. See "Getting the Right Fit" below.
- Determine your replacement rail.
- Remove existing ladder or rail from anchors by untightening the wedge.
- Install new ladder or rail into existing anchors.

#### GETTING THE RIGHT FIT

When measuring your current rail for a replacement, take the following measurements.

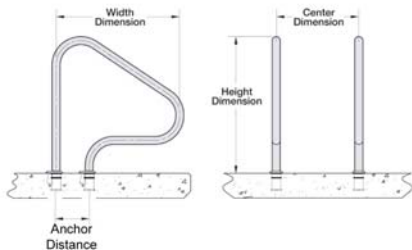

Download our rail identification guide at [www.srsmith.com/railid](http://www.srsmith.com/railid)

ARTISAN RAIL MODEL		EASILY REPLACES
Artisan Hand Rail		Figure 4
Artisan Stair Rail		5' 2-Bend or 5' 3-Bend Stair Rails
Artisan Ladder		24" 3-Step Ladder
Artisan Deck-Mounted Stair Rail		DMS-100, 101, 102 & 103
Artisan Deck-Mounted Hand Rail		Deck Mounted Rail 50-902

## Suggested Anchor Types

Part Number	Description	Tubing
AS-100P	Universal Anchor, Plastic	1.90" OD Tubing
AS-100B	4" Bronze Anchor	1.90" OD Tubing
AS-200B	4" Bronze Anchor	1.50" OD Tubing

## Anchor Placement

The table below outlines the distance between anchors and the minimum anchor setback. Before installing make sure to follow NEC or local building codes.

Rail Type	Distance between Anchors (On Center)	Anchor Setback
4' 2-Bend	4'-0"	6" minimum
5' 2-Bend	5'-0"	6" minimum
6' 2-Bend	6'-0"	6" minimum
4' 3-Bend	4'-0"	6" minimum
5' 3-Bend	5'-0"	6" minimum
5'6" 3-Bend	5'-6"	6" minimum
6' 3-Bend	6'-0"	6" minimum
6'-6" 3-Bend	6'-6"	6" minimum
7' 3-Bend	7'-0"	6" minimum
8' 3-Bend	8'-0"	6" minimum
50-901	30"	6" minimum
50-770	32"	6" minimum
50-902	36"	6" minimum
50-766	40"	6" minimum
50-903	42"	6" minimum
Artisan Hand Rail	8"	6" minimum
Artisan Stair Rail	5'-0"	6" minimum
Artisan Ladder	20"	17.5"
Artisan Deck-Mounted Stair Rail	8"	6" minimum
Artisan Deck-Mounted Hand Rail	36"	6" minimum
DMS-100	8"	6" minimum
DMS-101	8"	6" minimum
DMS-102	8"	6" minimum
DMS-103	8"	6" minimum
Figure 4 (2 sizes)	8"	18" or 22"
Camelback Ladder	19" or 20"*	5.5"
Dade County Ladder (4 sizes)	19" or 20"*	19", 27", 29" or 31"
Economy Ladder	19" or 20"*	17"
On-ground Ladder	19" or 20"*	6" minimum
P Rails	19" or 20"*	22.75"
Parallel-Look Ladder	19" or 20"*	3.5"
PR 500	8"	6" minimum
Residential Ladder	19" or 20"*	17.5"
Residential Ring	3.63"	19"
Snap-Lok Ladder	19" or 20"*	17.5"
Spa Rail	No Anchor - drills into deck	19"

\*Elite models are 20" O.C. and the Econoline models are 19" O.C. See manufacturer's specifications for more product detail.