

ONGA CLEAN & CLEAR CARTRIDGE FILTERS



Code	Description
160426	CC240 Clean and Clear Plus Filter "24
160427	CC320 Clean and Clear Plus Filter "32
160428	CC420 Clean and Clear Plus Filter "42
160429	CC520 Clean and Clear Plus Filter "52


FILTER DATA

Model Number	Filter Area Sq.	Vertical* Clearance	Filter Diameter	Flow Rate GPM		PM Turnover Capacity (Gallons)		•
	Ft			Res. **	Com.	8hrs	10hrs	12hrs
CCP240	240	56"	21.5"	90	90	43,200	54,000	64,800
CCP3201	320	62"	21.5"	120	120	57,600	72,000	86,400
CCP4201	420	68"	21.5"	150	150	72,000	90,000	108,000
CCP5201	520	74"	21.5"	150	150	72,000	90,000	108,000

¹NSF Listed clearance to remove filter elements flow rate

*Required **Maximum

PRESSURE LOSS VERSUS FLOW ACROSS ALL MODELS

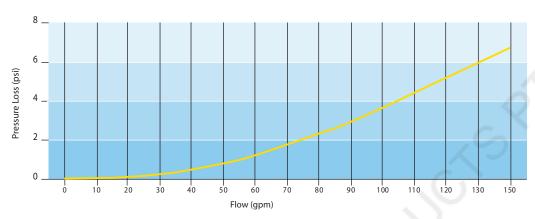

Disclaimers Every endeavour has been made to publish the correct details in this leaflet. No responsibility will be taken for errors, omissions or changes in product specifications. All performace data taken at sea level.

FOUR CARTRIDGES IN A COMPACT DESIGN

Clean & Clear Plus cartridge filters contain four polyester cartridges that hold enormous amounts of dirt. Yet are easy to clean. The fibreglass reinforced tank halves are secured with an innovative clamp ring - just loosen the ring and remove the top half for easy cartridge access and rinsing. Filter maintenance doesn't get any easier.

- Continuous internal air bleed prevents air build-up, to keep the filter operating at peak performance.
- Single-piece base and body for strength, stability, and years of dependable service.
- One year limited warranty. See warranty for details.

