




Quality Pool & Spa Products

## COMMERCIAL STARTING BLOCKS - MODEL SPL

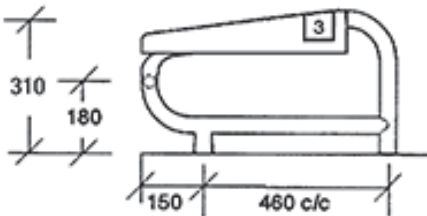

### Model SPL Starting Block

Code	Description	Front Legs	Rear Legs
PDA784	SPL.F	Flanged	Flanged
PDA785	SPL.R	150mm socket	Capped
PDA786	SPL.A	Adjustable	150mm socket

Low profile design - used where deck to water level exceeds 200mm

## SPECIFICATIONS

### Model SPL Starting Block

The Pooldeck SP series of starting platforms are made of T316 polished stainless steel 38 mm $\varnothing$  with a 500 mm x 500 mm non-slip pattern blue fibreglass top with numbers. The SPL is designed for pools where the water level to the top of the coping exceeds 200 mm.

**Material:** Stainless Steel 38 mm $\varnothing$  mirror finish frame with 500mm x 500mm non-slip blue fibreglass top.

**Which one is right for me:** The starting platform must physically fit the coping / concourse. There is the coping height, coping width and water depth issues to address. Regulatory guidelines for competition and recreational swimming may also need to be observed. We can help choose the platform right for you. We need coping width, coping height from concourse, coping height from water level and water depth before we can recommend a platform that will suit your requirements.

**Removable:** Two legs are 150 mm longer which allows them to sit into the PSSP post socket that are core drilled and glued into the coping / concourse. The other two legs have adjustable feet with lock nuts fitted.

**Flanged:** A flange allows you to fix the starting platform to the coping / concourse using a bolt and plug set or similar. (3 per flange)