


## COMMERCIAL STARTING BLOCKS - MODEL SP2

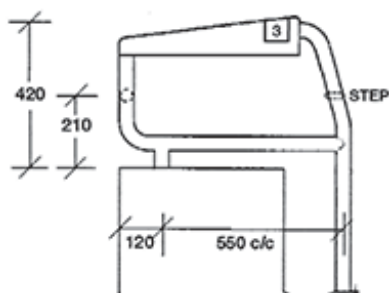

### Model SP2 Starting Block

Code	Description	Front Legs	Rear Legs
PDA787	SP2.F	Flanged	Flanged
PDA788	SP2.R	150mm socket	Capped
PDA789	SP2.A	Adjustable	150mm socket

Design to mount over narrow upstand or concrete block. Rear legs made to suit upstand height above concourse.

Upstand height above concourse must be nominated with order

## SPECIFICATIONS

### Model SP2 Starting Block

The Pooldeck SP series of starting platforms are made of T316 polished stainless steel 38 mmø with a 500 mm x 500 mm non-slip pattern blue fibreglass top with numbers. The SP2 is designed for narrow copings and has extended rear legs.

**Material:** Stainless Steel 38 mmø mirror finish frame with 500mm x 500mm non-slip blue fibreglass top.

**Which one is right for me:** The starting platform must physically fit the coping / concourse. There is the coping height, coping width and water depth issues to address. Regulatory guidelines for competition and recreational swimming may also need to be observed. We can help choose the platform right for you. We need coping width, coping height from concourse, coping height from water level and water depth before we can recommend a platform that will suit your requirements.

**Removable:** Two legs are 150 mm longer which allows them to sit into the PSSP post socket that are core drilled and glued into the coping / concourse. The other two legs have adjustable feet with lock nuts fitted.

**Flanged:** A flange allows you to fix the starting platform to the coping / concourse using a bolt and plug set or similar. (3 per flange)